


CS and LC Uniboot Duplex Optical Jumpers - Premium

NEW!

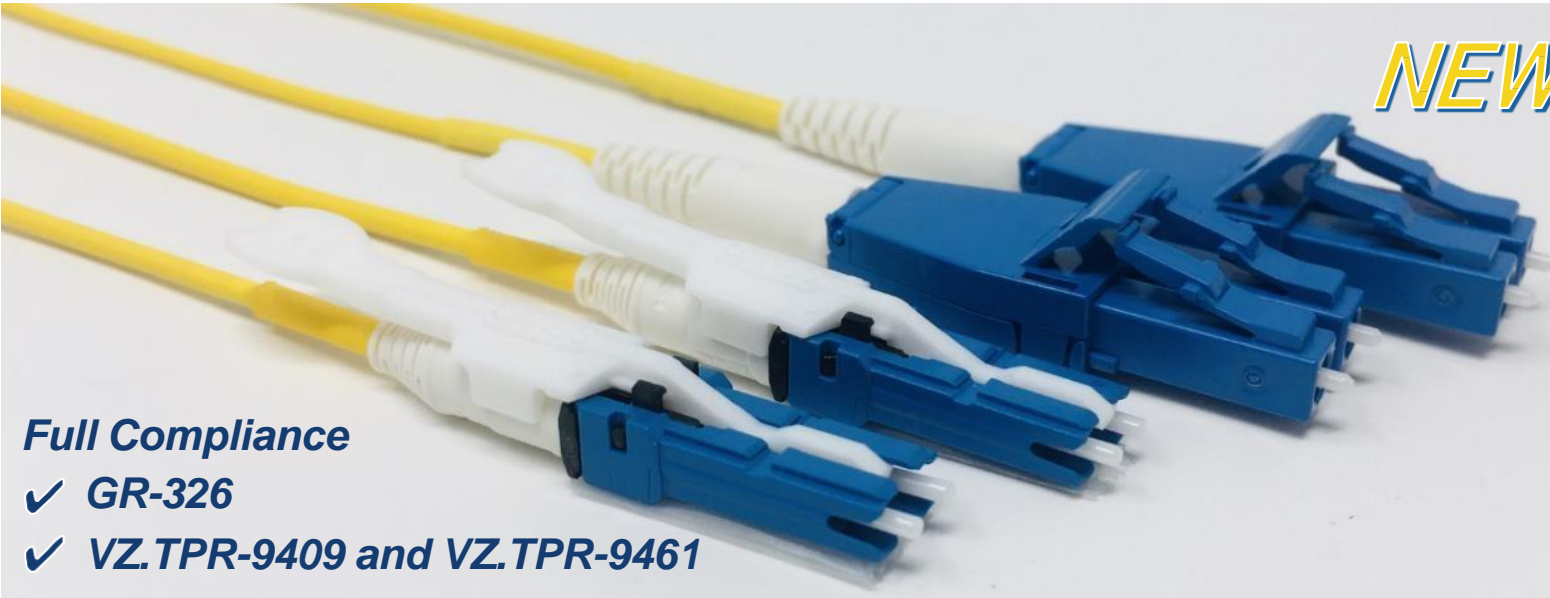

Full Compliance

- ✓ GR-326
- ✓ VZ.TPR-9409 and VZ.TPR-9461

Go!Foton's CS and LC Uniboot Optical Jumpers are the latest technology advancement for the communication industry's next generation 200G and 400G network applications.

Description:

Go!Foton's CS (3.8mm pitch) and LC Uniboot (6.25mm pitch) Optical Jumpers are engineered and manufactured to the highest standards providing mission critical networks with worry free optical performance and superior optical fiber density. These superior quality optical jumpers are made to be highly durable exceeding industry standards for all current and next generation applications.



The Go!Foton CS-CS and CS-LC Duplex Uniboot optical jumpers provide a smaller footprint to support the space-critical, fiber-dense applications emerging throughout Datacenter and Telecommunication networks.

Features and Benefits:

- Singlemode and multimode fiber types
- CS is 40% smaller than standard LC Duplex
- Proven LC ferrule technology
- Variety of push-pull tabs available for ease of use and connector access
- 100% IL and RL tested and verified
- Controlled end-face geometry to improve connector performance.
- Compliant with GR-326, VZ.TPR-9409 and VZ.TPR-9461.

Applications:

- 200Gbps and 400Gbps Networks
- QSFP-DD and OSFP next gen transceivers
- High density fiber management
- Next generation switches and routers
- Wavelength selective switches
- CS-CS and CS-LC options available

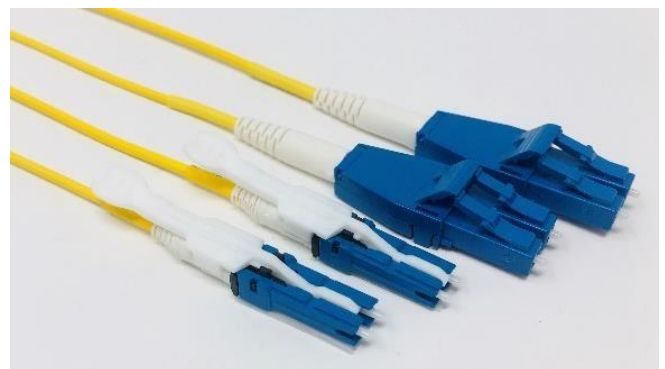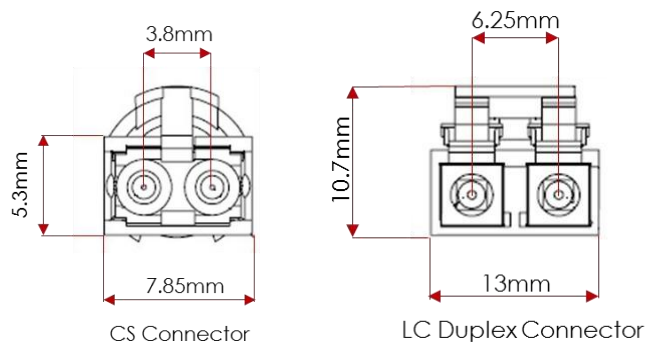

Specifications:

Optical	Specification
Insertion Loss	SM(PC): $\leq 0.20\text{dB}$ SM(APC): $\leq 0.30\text{dB}$ MM: $\leq 0.50\text{dB}$
Return Loss	SM(PC): $\geq 55\text{dB}$ SM(APC): $\geq 65\text{dB}$ MM: $\geq 30\text{dB}$
Fiber Type	Singlemode: G.652D, G.657A1, G.657A2/B2, G.657B3 Multimode: OM1, OM2, OM3, OM4
Mechanical	Specification
Fiber Jacket Type	OFNR, LSZH, OFNP and Dual OFNR/LSZH Rated
Cordage Diameter	2mm, 3mm
Connector Type	CS and LC Uniboot
Fiber Length	Customized as per customer required application
Push-Pull Tab Lengths (CS)	48mm, 55mm, 62mm and 69mm

Ordering Guide:

